Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

CHI MEI OPTOELECTRONICS CORP.

Approval

TFT LCD Approval Specification

MODEL NO.: V315B3 - L01 (ECO only)

Customer: _____

Approved by: _____

Note:

Approved By	TV Head Division	
	LY Chen	

Reviewed By	QA Dept.	Product Development Div.
	Kc-Ko	WT Lin

Prepared By	LCD TV Marketing and Product Management Div.	
	Ken Wu	Peter Liu

Version 6.0

- CONTENTS -

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

REVISION HISTORY

Version	Date	Page (New)	Section	Description
Ver 2.0	Oct 27,08'	All	All	Approval Specification was first issued.

Version 6.0

1. GENERAL DESCRIPTION

1.1 OVERVIEW

V315B3- L01 is a 31.5" TFT Liquid Crystal Display module with 6U-type CCFL Backlight unit and 1ch-LVDS interface. This module supports 1366 x 768 WXGA format and can display 16.7M colors. The inverter module for backlight is built-in.

1.2 FEATURES

- High brightness (450 nits)
- Ultra-high contrast ratio (2500:1)
- Faster response time (gray to gray average 6.5ms)
- High color saturation NTSC 72%
- Ultra wide viewing angle : 176(H)/176(V) (CR≥20) with Super MVA technology
- DE (Data Enable) only mode
- LVDS (Low Voltage Differential Signaling) interface
- Color reproduction (nature color)
- Low color shift function

1.3 APPLICATION

- TFT LCD TVs
- Multi-Media Display

1.4 GENERAL SPECIFICATI0NS

Item	Specification	Unit	Note
Active Area	697.6845 (H) x 392.256 (V) (31.51" diagonal)	mm	(1)
Bezel Opening Area	703.8 (H) x 398.4 (V)	mm	
Driver Element	a-si TFT active matrix	-	
Pixel Number	1366 x R.G.B. x 768	pixel	
Pixel Pitch (Sub Pixel)	0.17025(H) x 0.51075 (V)	mm	
Pixel Arrangement	RGB vertical stripe	-	
Display Colors	16.7M	color	
Display Operation Mode	Transmissive mode / Normally black	-	
Surface Treatment	Anti-Glare coating (Haze 17%),Hard coating (2H)	-	

1.5 MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal(H)	759	760	761	mm	(1)
	Vertical(V)	449	450	451	mm	(1)
	Depth(D)	40.1	41.1	42.1	mm	To PCB cover
	Depth(D)	49.2	50.2	51.2	mm	To inverter cover
Weight		-	6500	-	g	

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

2. ABSOLUTE MAXIMUM RATINGS

2.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T_{ST}	-20	+60	ºC	(1)
Operating Ambient Temperature	T_{OP}	0	+50	ºC	(1), (2)
Shock (Non-Operating)	S_{NOP}	-	50	G	(3), (5)
Vibration (Non-Operating)	V_{NOP}	-	1.0	G	(4), (5)

Note (1) Temperature and relative humidity range is shown in the figure below.

(a) 90 %RH Max. (Ta $\leq$ 40 ºC).

(b) Wet-bulb temperature should be 39 ºC Max. (Ta > 40 ºC).

(c) No condensation.

Note (2) The maximum operating temperature is based on the test condition that the surface temperature of

display area is less than or equal to 65 ºC with LCD module alone in a temperature controlled chamber.

Thermal management should be considered in final product design to prevent the surface temperature of

display area from being over 65 ºC. The range of operating temperature may degrade in case of improper

thermal management in final product design.

Note (3) 11 ms, half sine wave, 1 time for ± X, ± Y, ± Z.

Note (4) 10 ~ 200 Hz, 10 min, 1 time each X, Y, Z.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so

that the module would not be twisted or bent by the fixture.

Relative Humidity (%RH)

Temperature (ºC)

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
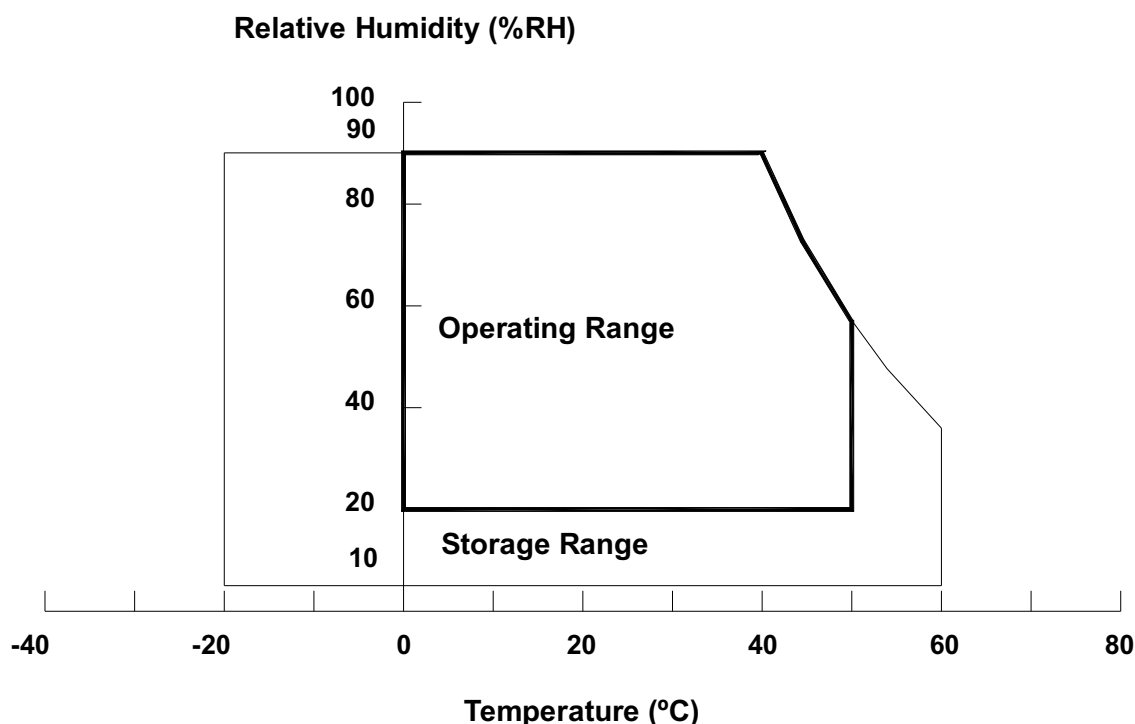
2.2 Package storage

When storing modules as spares for a long time, the following precaution is necessary.

(a) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35℃ at normal humidity without condensation.

(b)The module shall be stored in dark place. Do not store the TFT-LCD module in direct sunlight or fluorescent light.

2.3 ELECTRICAL ABSOLUTE RATINGS

2.3.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	Vcc	-0.3	13.0	V	(1)
Input Signal Voltage	V_{IN}	-0.3	3.6	V	

2.3.2 BACKLIGHT UNIT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Lamp Voltage	V_W	—	3000	V_{RMS}	
Power Supply Voltage	V_{BL}	0	30	V	(1)
Control Signal Level	—	-0.3	7	V	(1), (3)

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Functional operation should be restricted to the conditions described under normal operating conditions.

Note (2) No moisture condensation or freezing.

Note (3) The control signals includes Backlight On/Off Control, I_PWM Control, E_PWM Control and ERR signal for inverter status output.
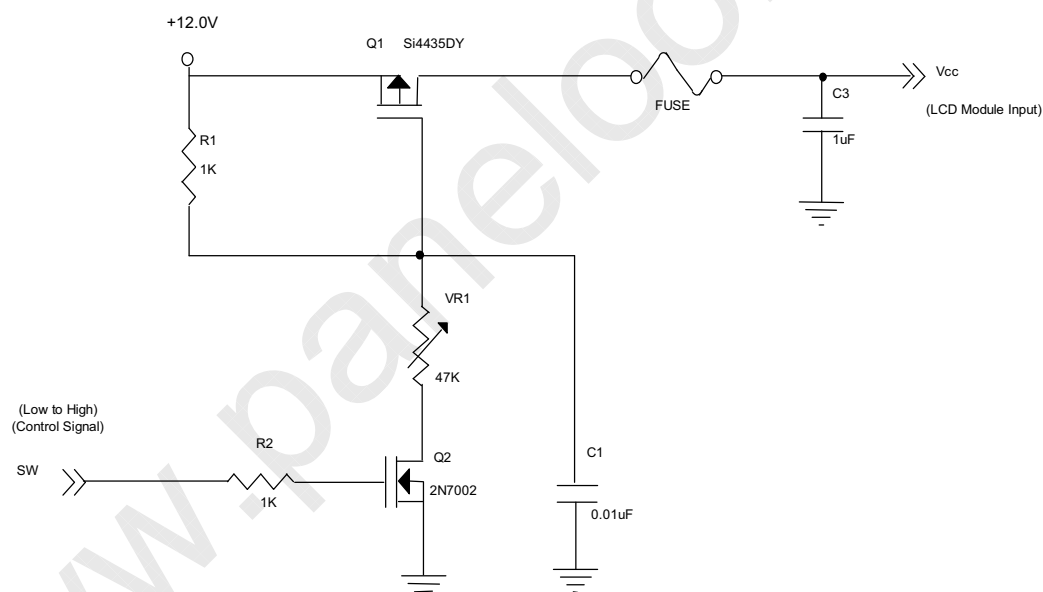
6

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

Ta = 25 ± 2 ºC

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		V_{CC}	11.4	12.0	12.6	V	(1)
Power Supply Ripple Voltage		V_{RP}	-	-	100	mV	
Rush Current		I_{RUSH}	-	-	3.4	A	(2)
Power Supply Current	White	I_{CC}	-	0.37	0.44	A	(3)
	Black		-	0.26	-	A	
	Vertical Stripe		-	0.35	-	A	
LVDS Interface	Differential Input High Threshold Voltage	V_{LVTH}	+100	-	-	mV	
	Differential Input Low Threshold Voltage	V_{LVTL}	-	-	-100	mV	
	Common Input Voltage	V_{LVC}	1.125	1.25	1.375	V	
	Terminating Resistor	R_T	-	100	-	ohm	
CMOS interface	Input High Threshold Voltage	V_{IH}	2.7	-	3.3	V	
	Input Low Threshold Voltage	V_{IL}	0	-	0.7	V	

Note (1) The module should be always operated within above ranges.

Note (2) Measurement Conditions:

Vcc rising time is 470us

7

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
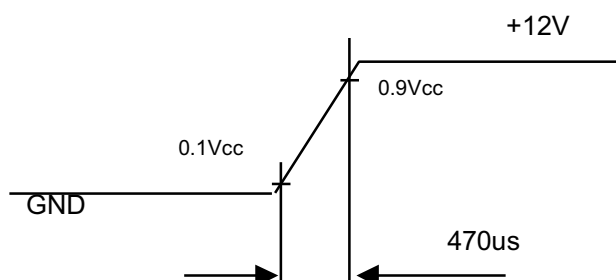
Note (3) The specified power supply current is under the conditions at Vcc =12V, Ta = 25 ± 2 ºC, f_v = 60 Hz, whereas a power dissipation check pattern below is displayed.

a. White Pattern

Active Area

b. Black Pattern

Active Area

c. Vertical Stripe Pattern
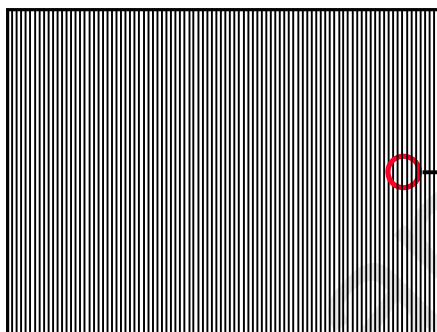
Active Area

3.2 BACKLIGHT INVERTER UNIT

3.2.1 CCFL (Cold Cathode Fluorescent Lamp) CHARACTERISTICS (Ta = 25 ± 2 ºC)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Lamp Voltage	V_W	1638	1820	2002	V_{RMS}	I_L = 7.5mA
Lamp Current	I_L	6.8	7.5	8.2	mA_{RMS}	(1)Hot side
Lamp Starting Voltage	V_S	-	-	3170	V_{RMS}	(2), Ta = 0 ºC
		-	-	2640	V_{RMS}	(2), Ta = 25 ºC
Operating Frequency	F_O	40	-	70	KHz	(3)
Lamp Life Time	L_{BL}	50,000		-	Hrs	(4)

8

Version 6.0

3.2.2 INVERTER CHARACTERISTICS (Ta = 25 ± 2 ℃)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Power Consumption	P_{BL}		80		W	(5),(6), I_L = 7.5mA
Input Voltage	V_{BL}	22.8	24	25.2	V_{DC}	
Input Current	I_{BL}		3.33		A	Non Dimming
Input Ripple Noise	-	-	-	912	mV_{P-P}	V_{BL}=22.8V
Oscillating Frequency	F_W	63	66	69	kHz	
Dimming frequency	F_B	150	160	170	Hz	
Minimum Duty Ratio	D_{MIN}	-	20	-	%	

Note (1) Lamp current is measured by utilizing high frequency current meters as shown below:
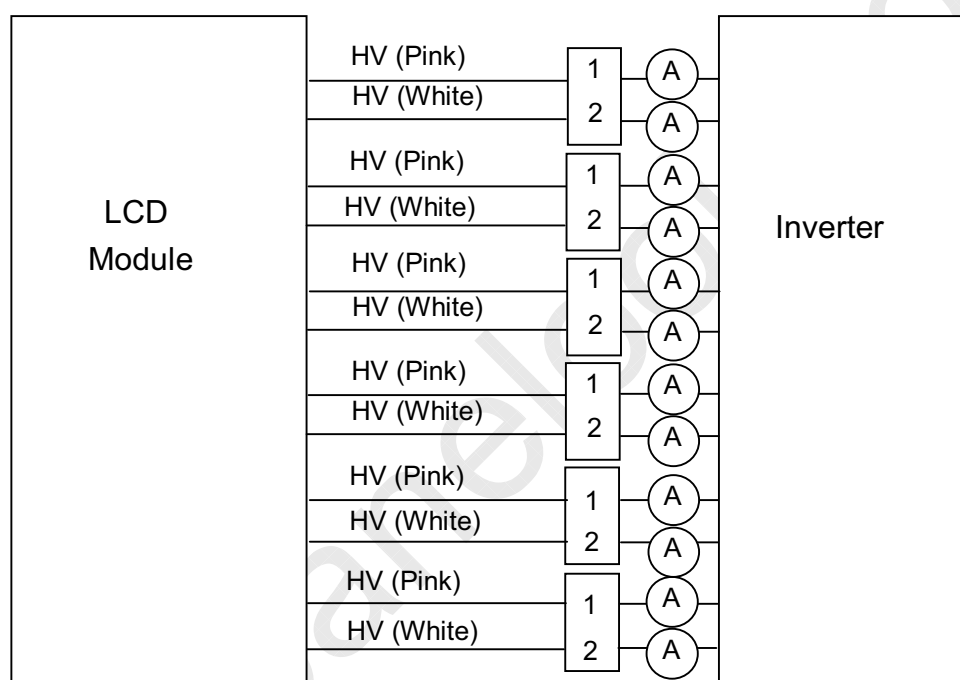
Note (2) The lamp starting voltage V_S should be applied to the lamp for more than 1 second under starting up duration. Otherwise the lamp could not be lighted on completed.

Note (3) The lamp frequency may produce interference with horizontal synchronous frequency of the display input signals, and it may result in line flow on the display. In order to avoid interference, the lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible.

Note (4) The life time of a lamp is defined as when the brightness is larger than 50% of its original value and the effective discharge length is longer than 80% of its original length (Effective discharge length is defined as an area that has equal to or more than 70% brightness compared to the brightness at the center point of lamp.) as the time in which it continues to operate under the condition at Ta = 25 ±2 ℃ and I_L = 6.8~8.2 mA_{RMS}.

Note (5) The power supply capacity should be higher than the total inverter power consumption P_{BL}. Since

Version 6.0

the pulse width modulation (PWM) mode was applied for backlight dimming, the driving current changed as PWM duty on and off. The transient response of power supply should be considered for the changing loading when inverter dimming.

Note (6) The measurement condition of Max. value is based on 31.5" backlight unit under input voltage 24V, average lamp current 7.8 mA and lighting 30 minutes later.

3.2.3 INVERTER INTERFACE CHARACTERISTICS

Parameter		Symbol	Test Condition	Value			Unit	Note
				Min.	Typ.	Max.		
On/Off Control Voltage	ON	V_{BLON}	—	2.0	—	5.0	V	
	OFF		—	0	—	0.8	V	
Internal PWM Control Voltage	MAX	V_{IPWM}	—	2.85	3.0	3.15	V	Maximum duty ratio
	MIN			—	0	—	V	Minimum duty ratio
External PWM Control Voltage	HI	V_{EPWM}	—	2.0	—	5.0	V	Duty on
	LO			0	—	0.8	V	Duty off
Status Signal	HI	Status	—	3.0	3.3	3.6	V	Normal
	LO			0	—	0.8	V	Abnormal
VBL Rising Time		Tr1	—	30	—	—	ms	10%-90%V_{BL}
VBL Falling Time		Tf1	—	30	—	—	ms	
Control Signal Rising Time		Tr	—	—	—	100	ms	
Control Signal Falling Time		Tf	—	—	—	100	ms	
PWM Signal Rising Time		T_{PWMR}	—	—	—	50	us	
PWM Signal Falling Time		T_{PWMF}	—	—	—	50	us	
Input impedance		R_{IN}	—	1	—	—	MΩ	
PWM Delay Time		T_{PWM}	—	100		—	ms	
BLON Delay Time		T_{on}	—	300	—	—	ms	
		T_{on1}	—	300	—	—	ms	
BLON Off Time		T_{off}	—	300	—	—	ms	

Note (1) The Dimming signal should be valid before backlight turns on by BLON signal. It is inhibited to change the internal/external PWM signal during backlight turn on period.

Note (2) The power sequence and control signal timing are shown in the following figure. For a certain reason, the inverter has a possibility to be damaged with wrong power sequence and control signal timing.

Note (3) While system is turned ON or OFF, the power sequences must follow as below descriptions:

Turn ON sequence: VBL → PWM signal → BLON

Turn OFF sequence: BLOFF → PWM signal → VBL

Version 6.0

CHI MEI OPTOELECTRONICS CORP.

Approval

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
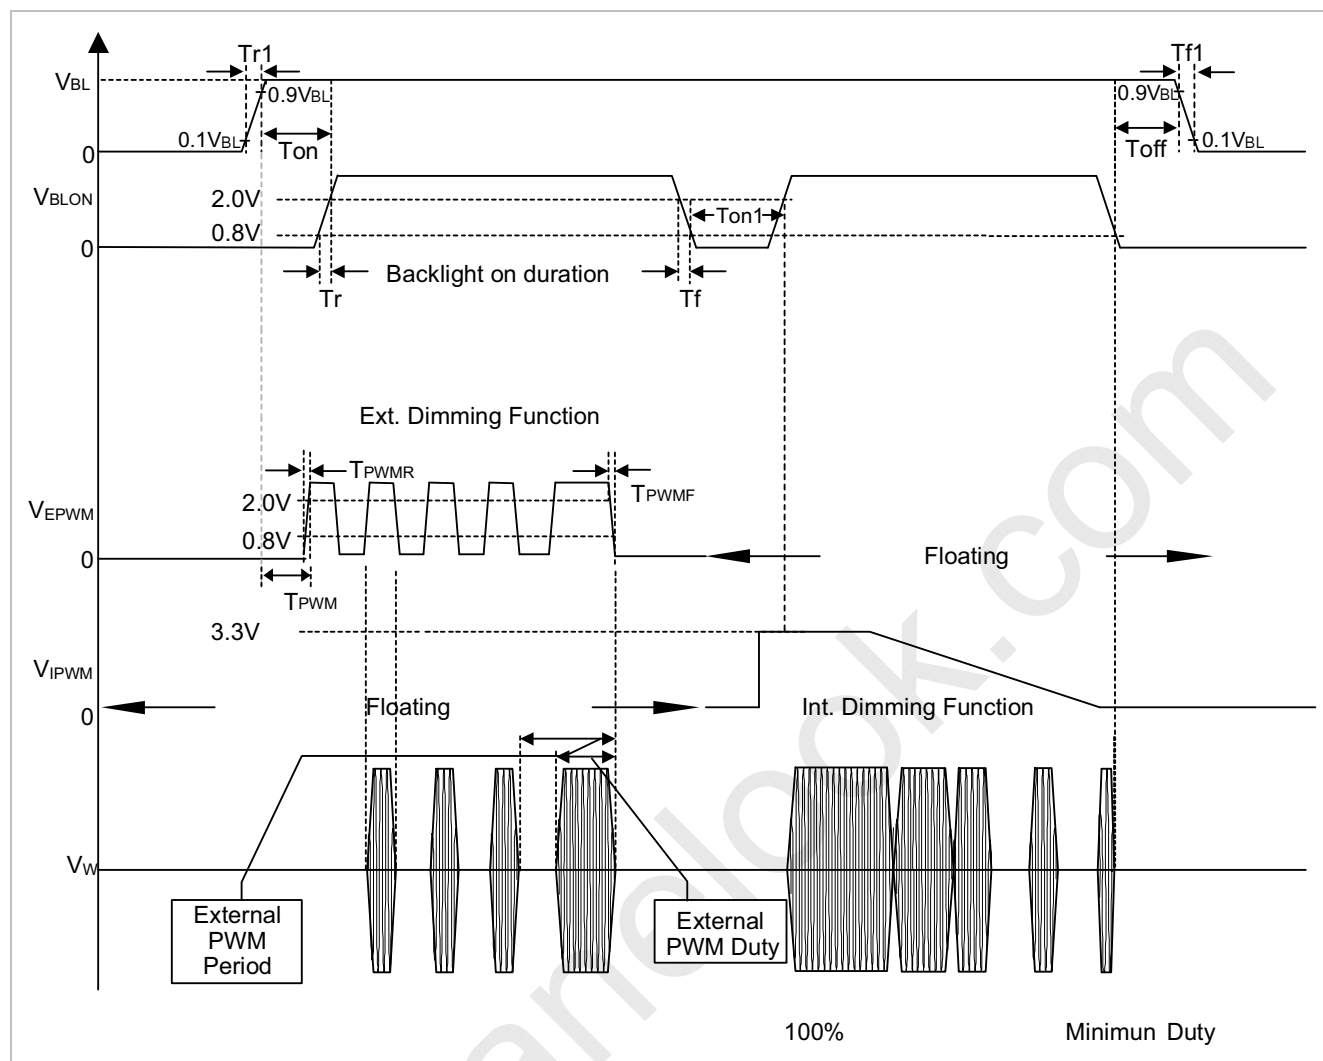
4. BLOCK DIAGRAM

4.1 TFT LCD MODULE

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
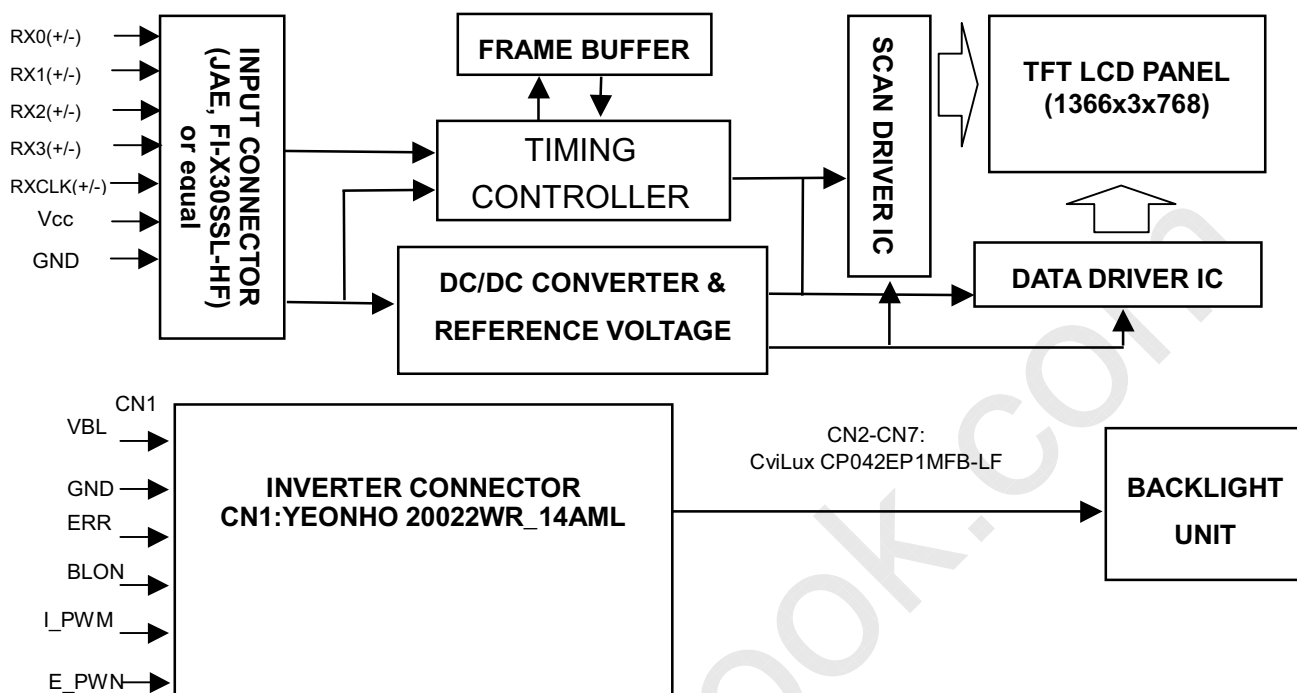
5. INTERFACE PIN CONNECTION

5.1 TFT LCD MODULE

CNF1 Connector Pin Assignment

Pin No.	Symbol	Description	Note
1	VCC	Power supply: +12V	
2	VCC	Power supply: +12V	
3	VCC	Power supply: +12V	
4	VCC	Power supply: +12V	
5	GND	Ground	
6	GND	Ground	
7	GND	Ground	
8	GND	Ground	
9	SELLVDS	Select LVDS data format	(2)(4)
10	ODSEL	Overdrive Lookup Table Selection	(3)(4)
11	GND	Ground	
12	RX0-	Negative transmission data of pixel 0	
13	RX0+	Positive transmission data of pixel 0	
14	GND	Ground	
15	RX1-	Negative transmission data of pixel 1	
16	RX1+	Positive transmission data of pixel 1	
17	GND	Ground	
18	RX2-	Negative transmission data of pixel 2	
19	RX2+	Positive transmission data of pixel 2	
20	GND	Ground	
21	RXCLK-	Negative of clock	
22	RXCLK+	Positive of clock	
23	GND	Ground	
24	RX3-	Negative transmission data of pixel 3	
25	RX3+	Positive transmission data of pixel 3	
26	GND	Ground	
27	NC	No connection	(5)
28	NC	No connection	(5)
29	GND	Ground	
30	GND	Ground	

Note (1) Connector type: FI-X30SSL-HF(JAE) or compatible

Note (2) Ground or OPEN: VESA, High: JEIDA LVDS format

   Please refer to 5.5 LVDS INTERFACE

Note (3) Overdrive lookup table selection. The Overdrive lookup table should be selected in accordance to the

   frame rate to optimize image quality.

ODSEL	Note
L or Open	Lookup table was optimized for 60 Hz frame rate.
H	Lookup table was optimized for 50 Hz frame rate.

Note (4)The internal resistance is about 7KΩ to ground . This interface threshold voltage must follow the CMOS

   interface standard, please refer to 3.1 CMOS interface.

Note (5) Reserved for internal use. Left it open.

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

5.2 BACKLIGHT UNIT

The pin configuration for the housing and leader wire is shown in the table below.

CN2-CN7 (Housing): CviLux CP042EP1MFB-LF or equivalent

Pin No.	Symbol	Description	Wire Color
1	HV	High Voltage	PINK
2	HV	High Voltage	WHITE

Note (1) The backlight interface housing for high voltage side is a model CP042EP1MFB-LF, manufactured by CviLux or equivalent. The mating header on inverter part number is CP042EP1MFB-LF

CviLux CP042ESFA00 or equivalent

HV (PINK, +)
HV (WHITE, -)

HV (PINK, +)
HV (WHITE, -)

HV (PINK, +)
HV (WHITE, -)

HV (PINK, +)
HV (WHITE, -)

HV (PINK, +)
HV (WHITE, -)

HV (PINK, +)
HV (WHITE, -)

14

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
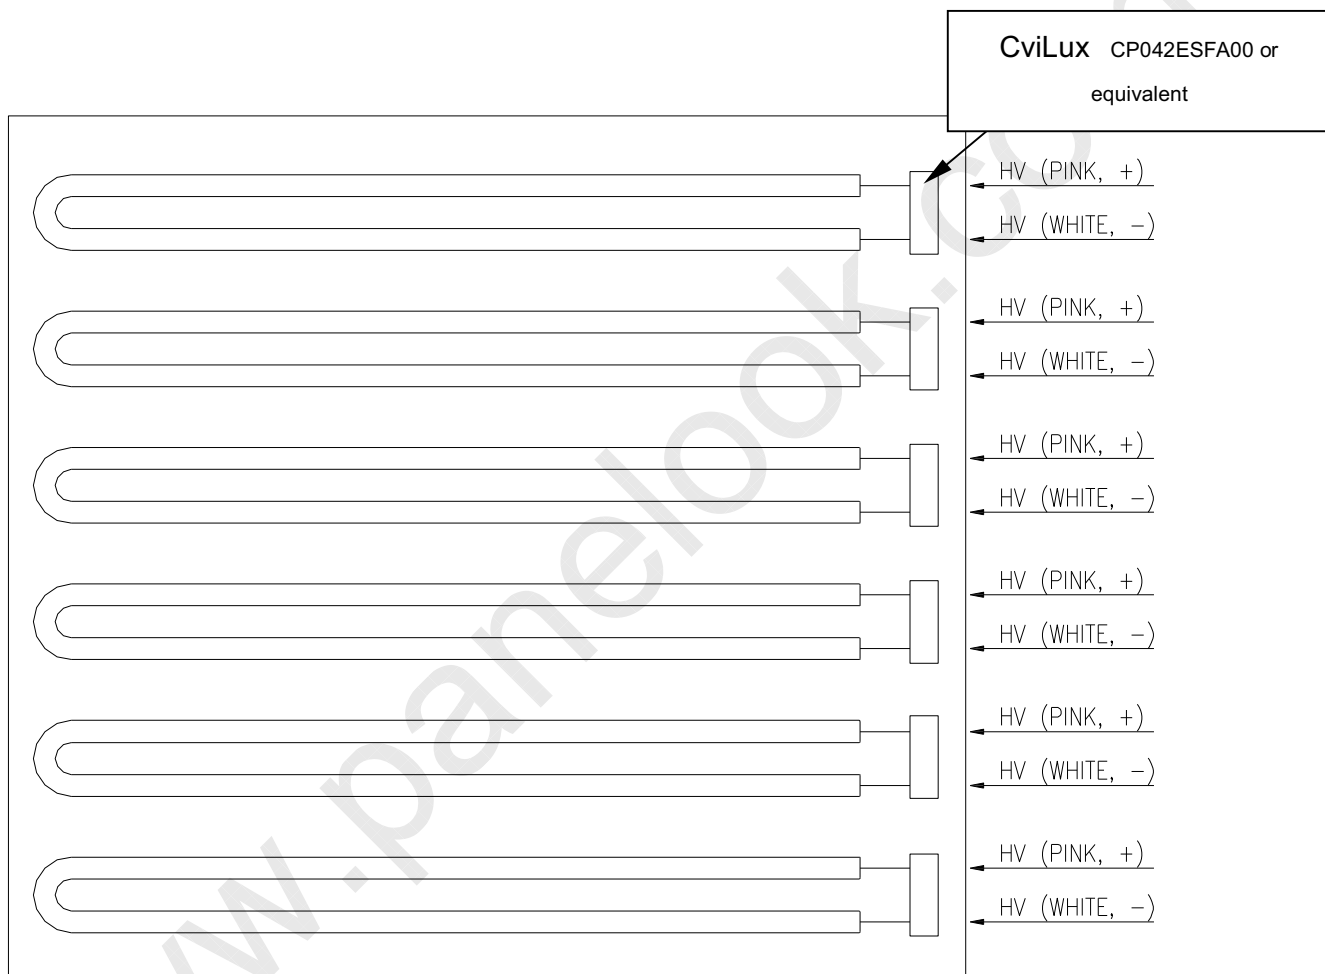
5.3 INVERTER UNIT

CN1(Header): YEONHO 20022WR_14AML

Pin No.	Symbol	Description
1	VBL	+24V Power input
2		
3		
4		
5		
6	GND	Ground
7		
8		
9		
10		
11	ERR	Normal (GND) Abnormal (open collector)
12	BLON	Backlight on/off control
13	I_PWM	Internal PWM control signal
14	E_PWM	External PWM control signal

Notice:

#PIN 13:Analog Dimming Control (Use Pin 13) : Pin 14 must open.

#PIN 14:PWM Dimming Control (Use Pin 14) : Pin 13 must open.

 #Pin 13(I_PWM) and Pin 14(E_PWM) can not open in same period.

CN2-CN7 (Header): CviLux CP042EP1MFB-LF

Pin No.	Symbol	Description
1	CCFL HOT	CCFL high voltage
2	CCFL HOT	CCFL high voltage

15

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

5.4 BLOCK DIAGRAM OF INTERFACE

CNF1
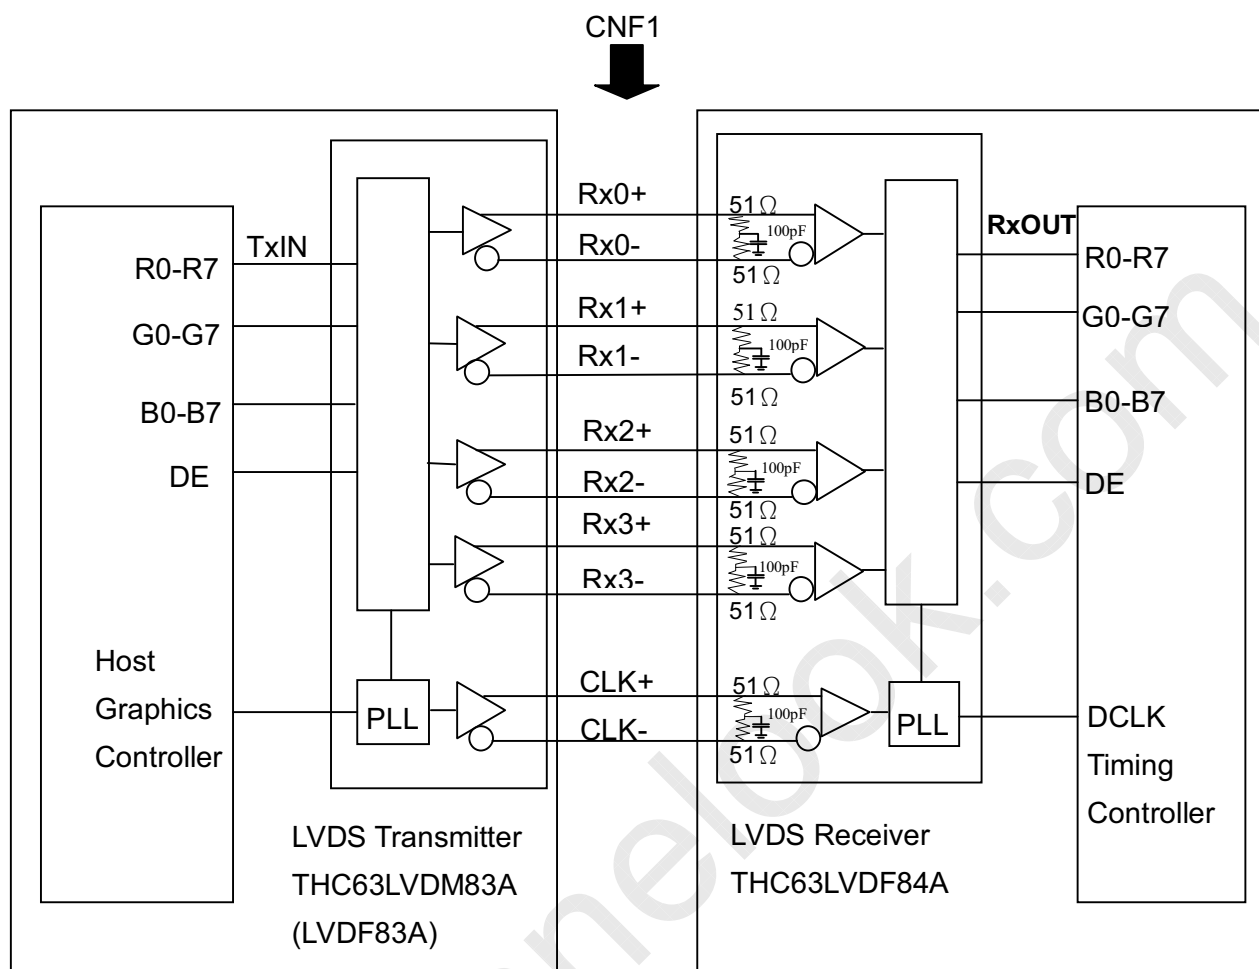
R0~R7   : Pixel R Data   ,

G0~G7   : Pixel G Data   ,

B0~B7   : Pixel B Data   ,

DE   : Data enable signal

Note (1) The system must have the transmitter to drive the module.

Note (2) LVDS cable impedance shall be 50 ohms per signal line or about 100 ohms per twist-pair line when it is
used differentially.

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

5.5 LVDS INTERFACE

SELLVDS = L or Open   (VESA)
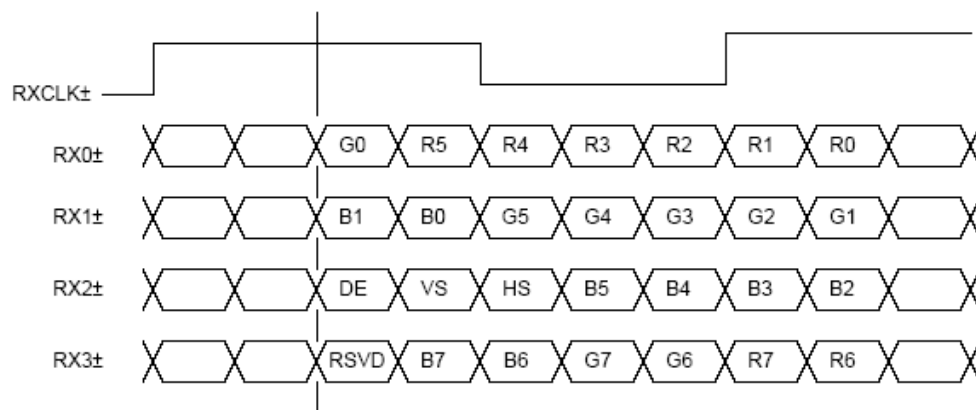
SELLVDS = H (JEIDA)

R0~R7: Pixel R Data (7; MSB, 0; LSB)

G0~G7: Pixel G Data (7; MSB, 0; LSB)

B0~B7: Pixel B Data (7; MSB, 0; LSB)

DE: Data enable signal

Notes(1) RSVD(reserved)pins on the transmitter shall be "H" or("L" or OPEN)

17

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

5.6 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

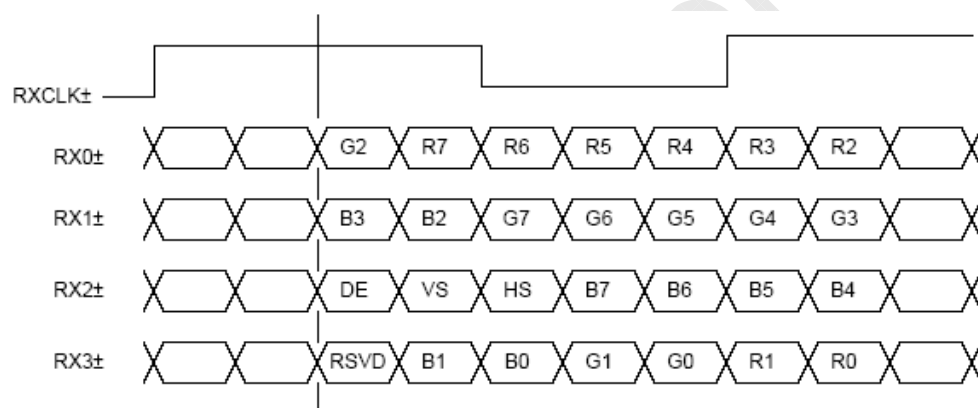| Color		Data Signal																							
		Red								Green								Blue							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale Of Green	Green(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale Of Blue	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage

18

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

6. INTERFACE TIMING

6.1 INPUT SIGNAL TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Receiver Clock	Frequency	1/Tc	60	76	82	MHz	
	Input cycle to cycle jitter	Trcl	-	-	200	ps	
LVDS Receiver Data	Setup Time	Tlvsu	600	-	-	ps	
	Hold Time	Tlvhd	600	-	-	ps	
Vertical Active Display Term	Frame Rate	Fr_5	47	50	53	Hz	(2)
		Fr_6	57	60	63	Hz	
	Total	Tv	778	806	888	Th	Tv=Tvd+Tvb
	Display	Tvd	768	768	768	Th	-
	Blank	Tvb	10	38	120	Th	-
Horizontal Active Display Term	Total	Th	1442	1560	1936	Tc	Th=Thd+Thb
	Display	Thd	1366	1366	1366	Tc	-
	Blank	Thb	76	194	570	Tc	-

Note (1) Since this module is operated in DE only mode, Hsync and Vsync input signals should be set to low

logic level. Otherwise, this module would operate abnormally.

(2) Please refer to 5.1 for detail information.

INPUT SIGNAL TIMING DIAGRAM

Version 6.0

Approval
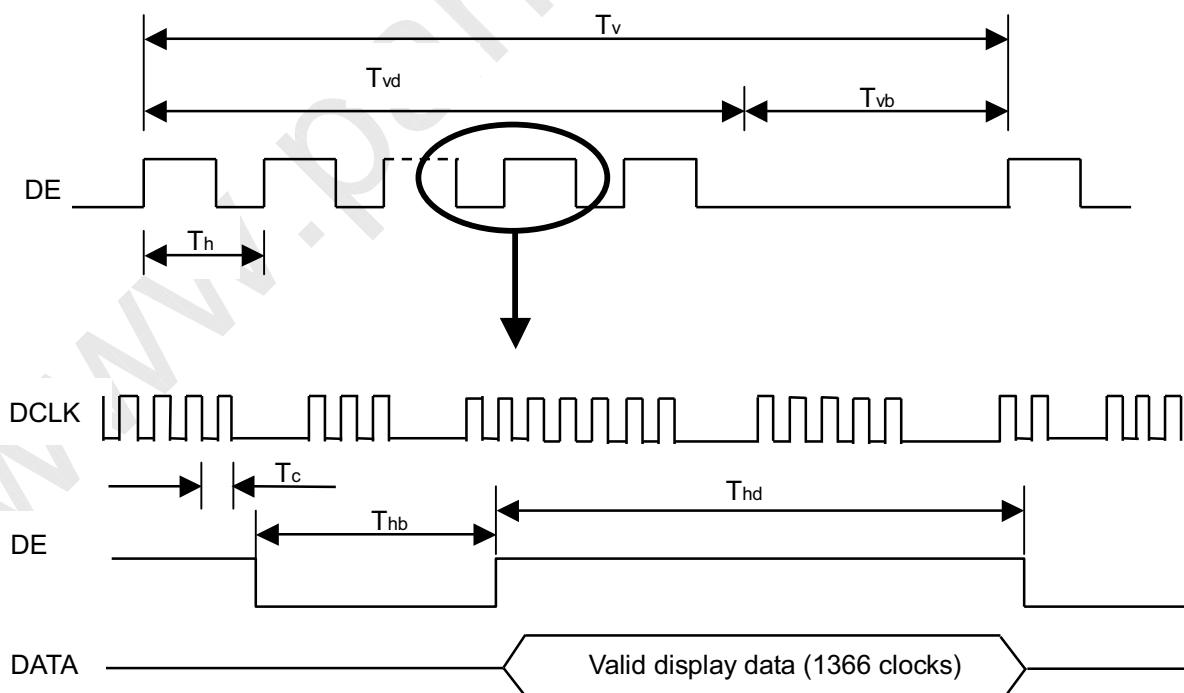
LVDS RECEIVER INTERFACE TIMING DIAGRAM

$$\frac{1T}{14} \quad \frac{3T}{14} \quad \frac{5T}{14} \quad \frac{7T}{14} \quad \frac{9T}{14} \quad \frac{11T}{14} \quad \frac{13T}{14}$$

20

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
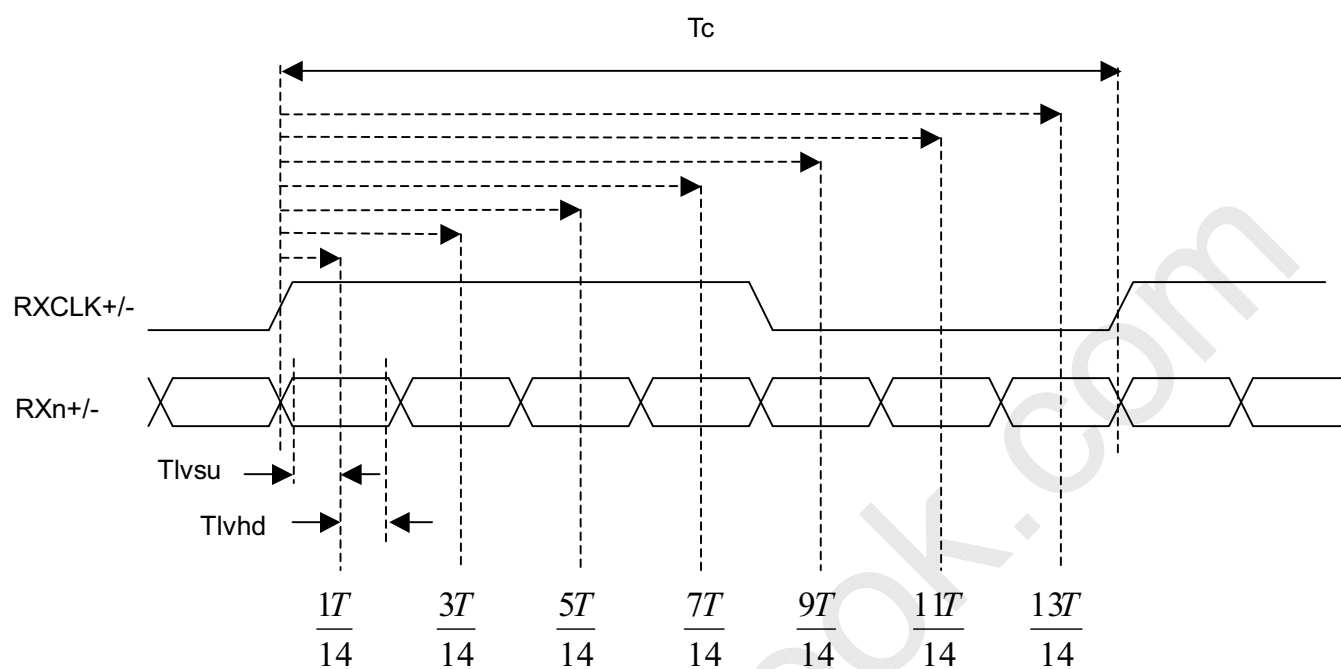
6.2 POWER ON/OFF SEQUENCE

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should be as the diagram below.

Power Supply Vcc

0.9 Vcc   0.9 Vcc

0.1Vcc   0.1Vcc

0V

$0.5 \leqq T_1 \leqq 10ms$
$0 \leqq T_2 \leqq 50ms$
$0 \leqq T_3 \leqq 50ms$
$500ms \leqq T_4$

T_1 T_3

T_2 T_4

LVDS Signals 0V   VALID

Power On   Power Off

$0 \leqq T_7 \leqq T2$
$0 \leqq T_8 \leqq T3$

T_7 T_8

Option Signals
(SELLVDS, ODSEL)

Backlight (Recommended)
$500ms \leqq T_5$
$100ms \leqq T_6$

50%   50%

T_5 T_6
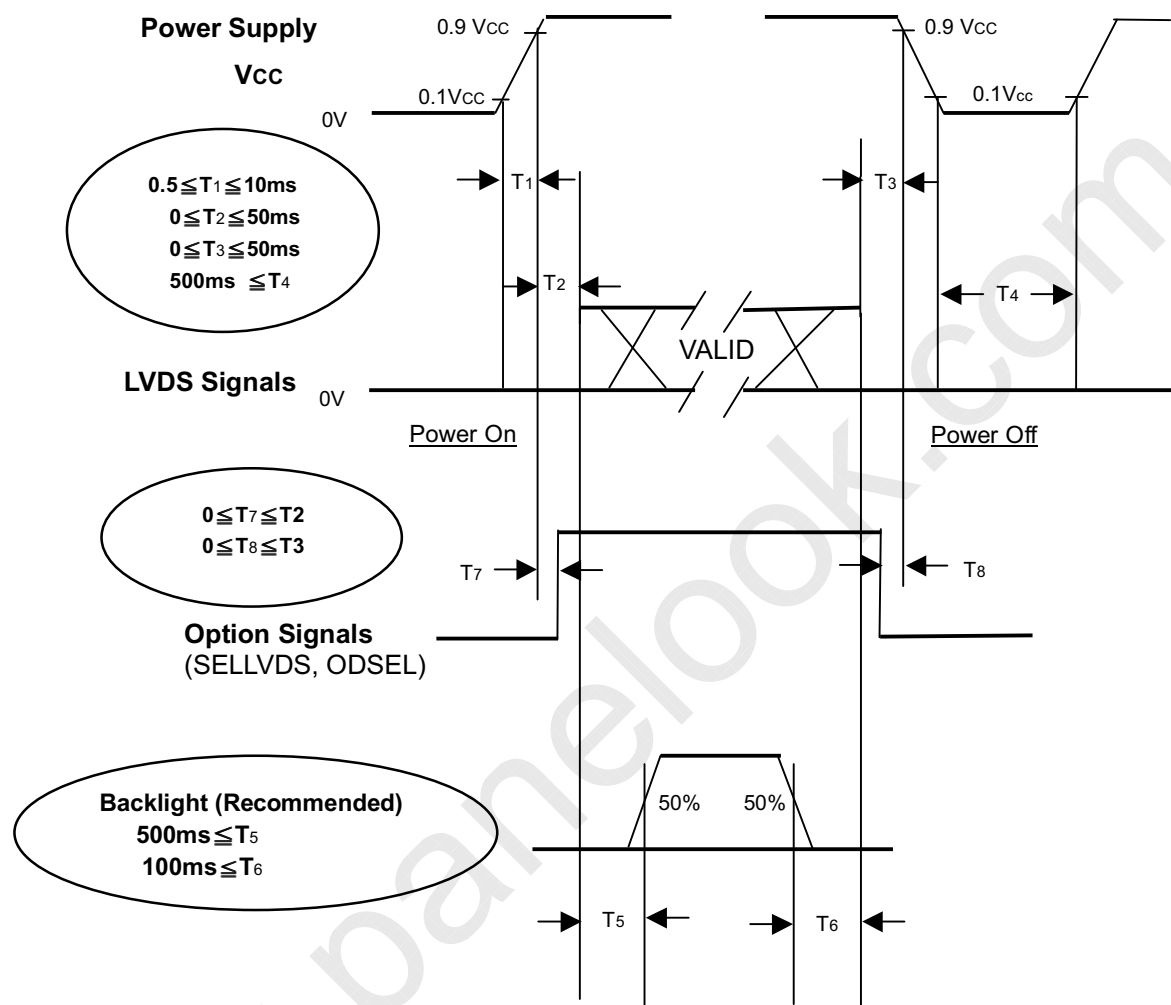
Power ON/OFF Sequence

Note (1) The supply voltage of the external system for the module input should follow the definition of Vcc.

Note (2) Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily become abnormal screen.

Note (3) In case of Vcc is in off level, please keep the level of input signals on the low or high impedance. If T2<0, that maybe cause electrical overstress failures.

Note (4) T4 should be measured after the module has been fully discharged between power off and on period.

Note (5) Interface signal shall not be kept at high impedance when the power is on.

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

7. OPTICAL CHARACTERISTICS

7.1 TEST CONDITIONS

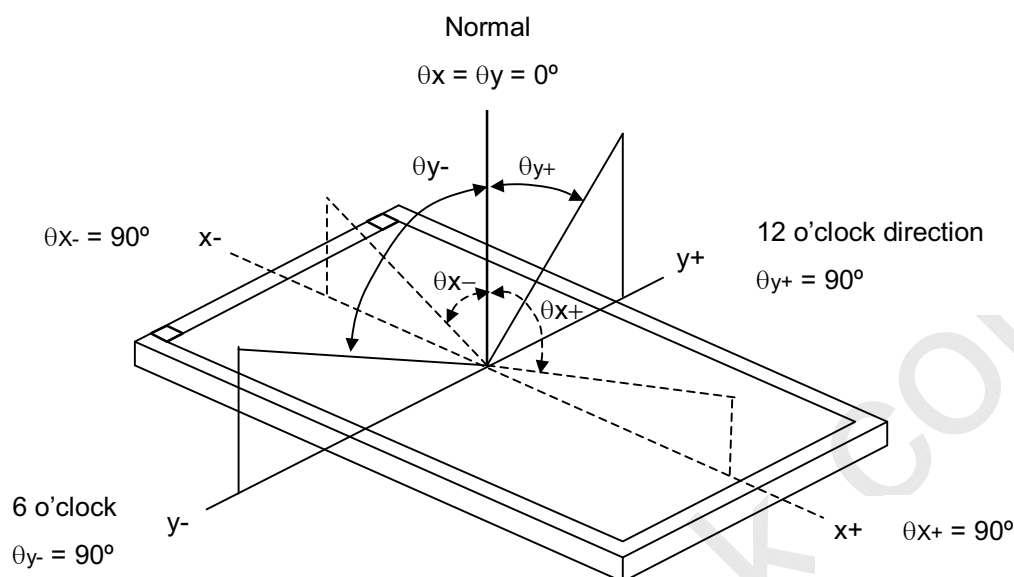| Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	^{o}C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V_{CC}	5.0	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
Lamp Current	I_L	7.5 ± 0.7	mA
Oscillating Frequency (Inverter)	F_W	66±3	KHz
Frame rate	Fr	60	Hz

7.2 OPTICAL SPECIFICATIONS

The relative measurement methods of optical characteristics are shown in 7.2. The following items should

be measured under the test conditions described in 7.1 and stable environment shown in Note (6).

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR		1500	2500	**-**	-	(2)
Response Time		Gray to gray average		-	6.5	12	ms	(3)
Center Luminance of White		L_C		400	450	**-**	cd/m^2	(4)
White Variation		δW		-	-	1.3	-	(7)
Cross Talk		CT		-	-	4.0	%	(5)
Color Chromaticity	Red	Rx	θ_x=0°, θ_Y =0° Viewing Angle at Normal Direction	Typ -0.03	0.640	Typ +0.03	-	(6)
		Ry			0.333		-	
	Green	Gx			0.272		-	
		Gy			0.600		-	
	Blue	Bx			0.144		-	
		By			0.070		-	
	White	Wx			0.280		-	
		Wy			0.290		-	
	Color Gamut	CG		68	72		%	NTSC
Viewing Angle	Horizontal	θ_x+	CR≥20	80	88	-	Deg.	(1)
		θ_x-		80	88	-		
	Vertical	θ_Y+		80	88	-		
		θ_Y-		80	88	-		

Version 6.0

Approval

Note (1)   Definition of Viewing Angle (θx, θy):

Viewing angles are measured by EZ-Contrast 160R (Eldim)

Normal

θx = θy = 0º

θy- θy+

θx- = 90º   x-

12 o'clock direction

θy+ = 90º

y+

θx− θx+

6 o'clock   y-

θy- = 90º

x+ θx+ = 90º

Note (2)   Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L255 / L0

L255: Luminance of gray level 255

L 0: Luminance of gray level 0

CR = CR (5), where CR (X) is corresponding to the Contrast Ratio of the point X at the figure in

Note (7).

Note (3)   Definition of Gray to Gray Switching Time :

100%
90%

Optical

Response

10%
0%

Time

Gray to gray
switching time

Gray to gray
switching time
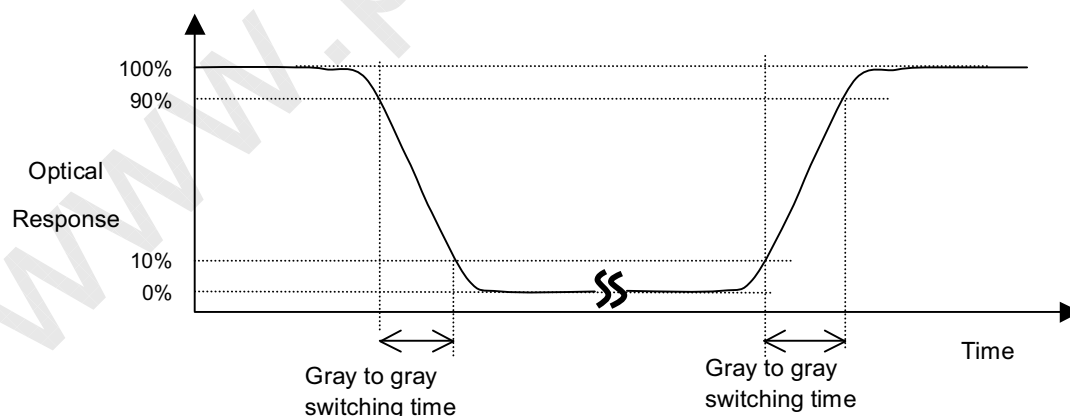
The driving signal means the signal of luminance 0%, 20%, 40%, 60%, 80%, 100%.

Gray to gray average time means the average switching time of luminance 0%,20%,

40%, 60%, 80%, 100% to each other.

Version 6.0

Note (4)   Definition of Luminance of White (L_C, L_{AVE}):

Measure the luminance of gray level 255 at center point and 5 points

$L_C = L(5)$

$L_{AVE} = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$

where L (x) is corresponding to the luminance of the point X at the figure in Note (7).

Note (5) Definition of Cross Talk (CT):

$CT = | Y_B - Y_A | / Y_A \times 100$ (%)

Where:

Y_A = Luminance of measured location without gray level 0 pattern (cd/m^2)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m^2)
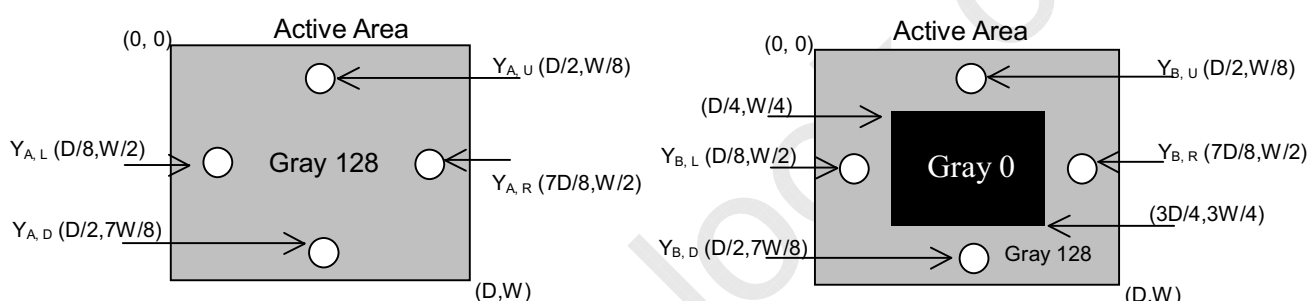
Note (6)   Measurement Setup:

The LCD module should be stabilized at given temperature for 1 hour to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 1 hour in a windless room.

24

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
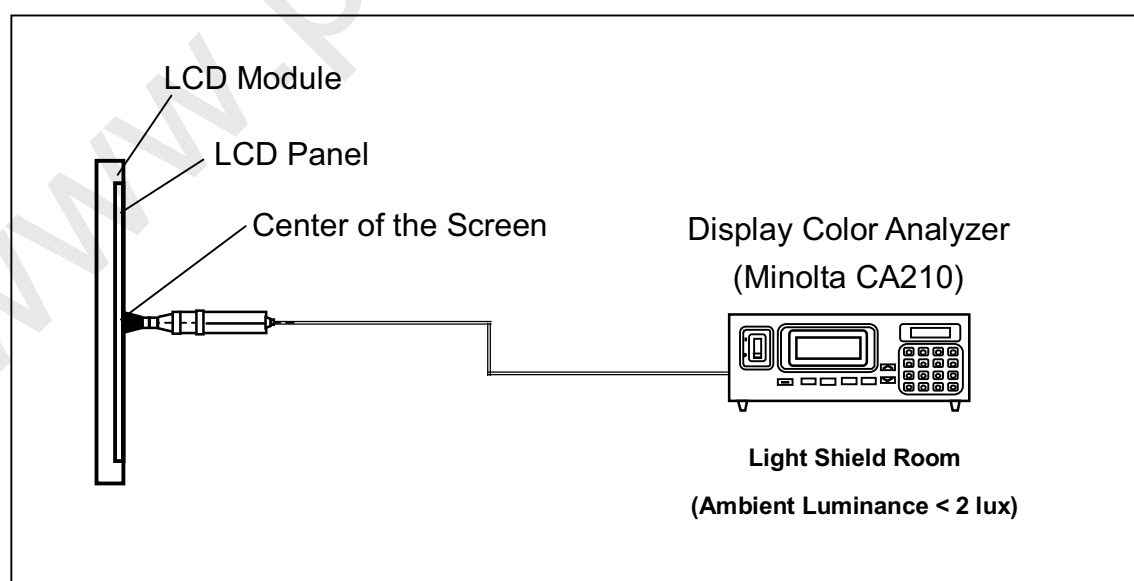
Note (7) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 5 points

δW = Maximum [L (1), L (2), L (3), L (4), L (5)] / Minimum [L (1), L (2), L (3), L (4), L (5)]

Horizontal Line

Active Area

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval
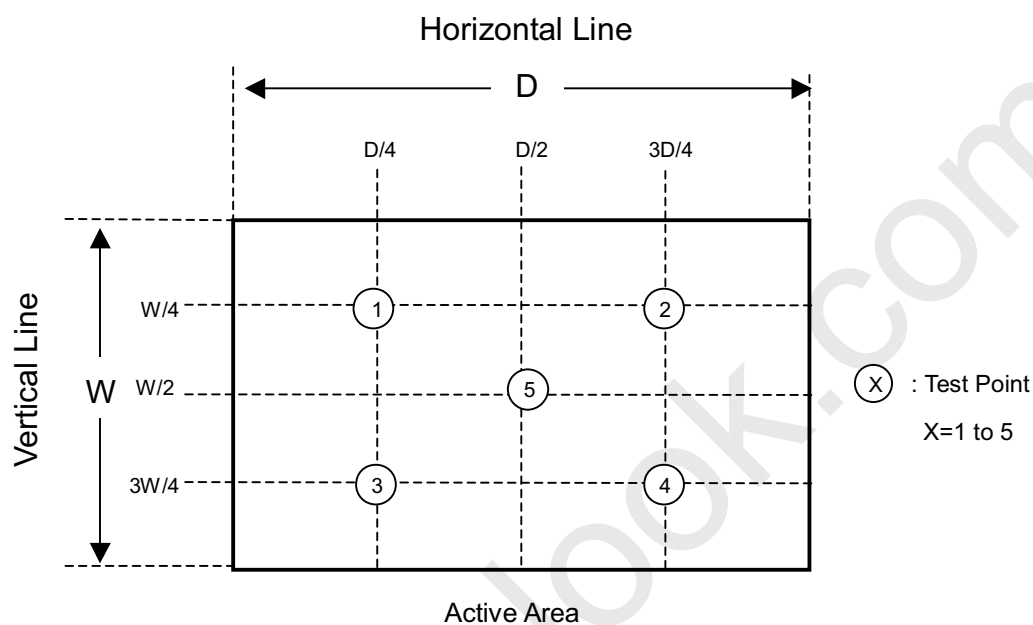
8. DEFINITION OF LABELS

8.1 CMO MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.
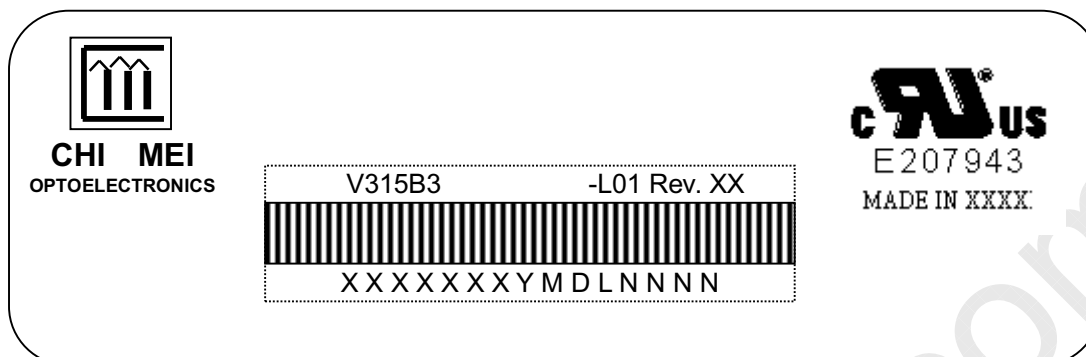
(a) Model Name: V315B3-L01

(b) Revision: Rev. XX, for example: A0, A1… B1, B2… or C1, C2…etc.

(c) Serial ID: X X X X X X X Y M D L N N N N

    Serial No.

    Product Line

    Year, Month, Date

    CMO Internal Use

    CMO Internal Use

    Revision

    CMO Internal Use
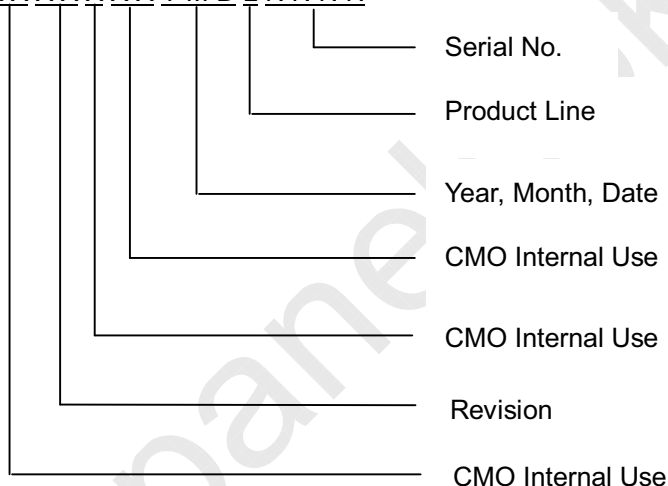
(d) Production Location:XXXX, for example:TAIWAN or CHINA .

Serial ID includes the information as below:

(a) Manufactured Date: Year: 0~9, for 2000~2009

                Month: 1~9, A~C, for Jan. ~ Dec.

                Day: 1~9, A~Y, for 1st to 31st, exclude I ,O, and U.

(b) Revision Code: Cover all the change

(c) Serial No.: Manufacturing sequence of product

(d) Product Line: 1 -> Line1, 2 -> Line 2, …etc.

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

9. PACKAGING

9.1 PACKING SPECIFICATIONS

   (1)   5 LCD TV modules / 1 Box

   (2)   Box dimensions : 834(L) X 380 (W) X 530 (H)

   (3)   Weight : approximately 38.5Kg (5 modules per box)

9.2 PACKING METHOD

Figures 9-1 and 9-2 are the packing method
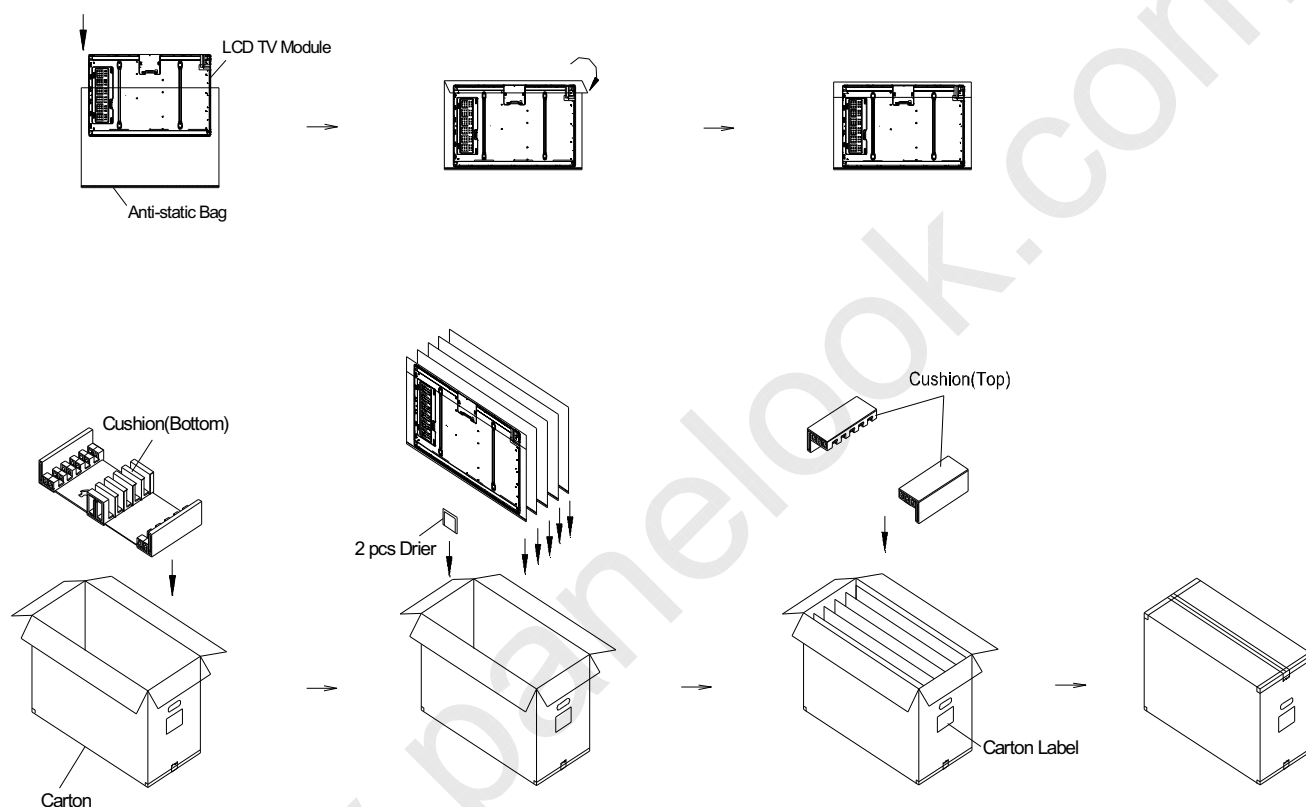
Figure.9-1 packing method

Version 6.0

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

Sea / Land Transportation
(40ft HQ Container)
Gross: 492kg

PP Belt
Corner Protector
(L700*50*50mm t=5)
PE Sheet
Film
Pallet
Film
PE Sheet
Pallet
(L1150*W850*140mm)
Corner Protector
(L1055*50*50mm t=5)
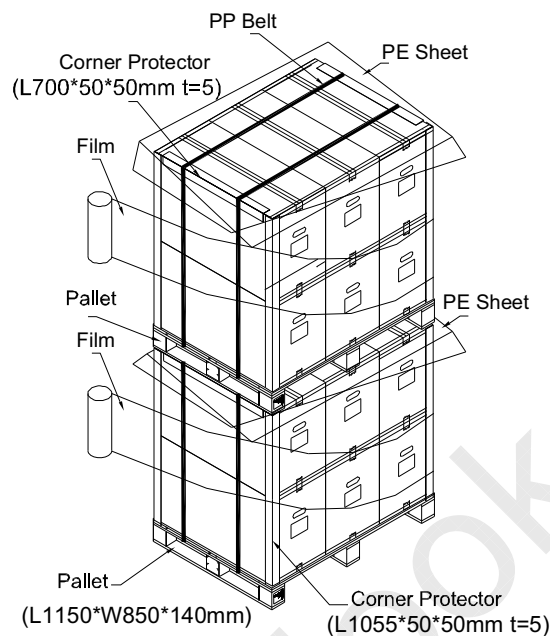
Sea / Land Transportation
(40ft Container)
Gross: 362kg

Corner Protector
(L800*50*50mm t=3)
PE Sheet
PP Belt
Film
Corner Protector
(L1350*50*50mm t=3)
Pallet
(L1150*W850*140mm)

28

Version 6.0

Approval
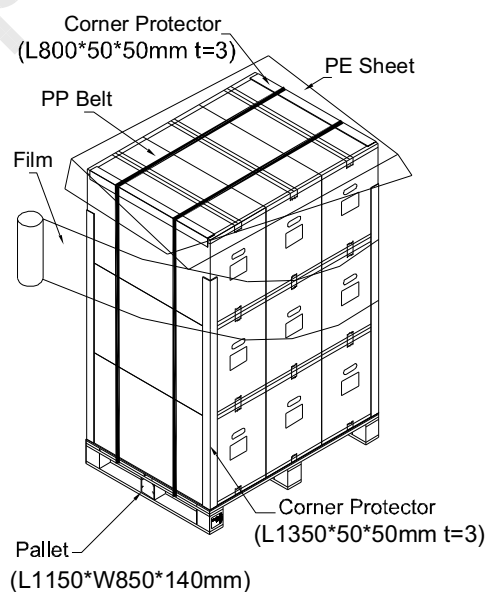
Air Transportation
Gross: 246kg

Figure.9-2 packing method

Version 6.0

10. PRECAUTIONS

10.1 ASSEMBLY AND HANDLING PRECAUTIONS

(1) Do not apply rough force such as bending or twisting to the module during assembly.

(2) It is recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.

(3) Do not apply pressure or impulse to the module to prevent the damage of LCD panel and backlight.

(4) Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.

(5) Do not plug in or pull out the I/F connector while the module is in operation.

(6) Do not disassemble the module.
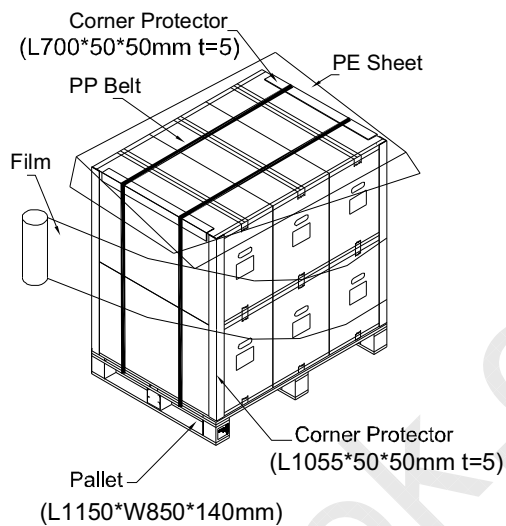
(7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.

(8) Moisture can easily penetrate into LCD module and may cause the damage during operation.

(9) High temperature or humidity may deteriorate the performance of LCD module. Please store LCD modules in the specified storage conditions.

(10) When ambient temperature is lower than 10ºC, the display quality might be reduced. For example, the response time will become slow, and the starting voltage of CCFL will be higher than that of room temperature.
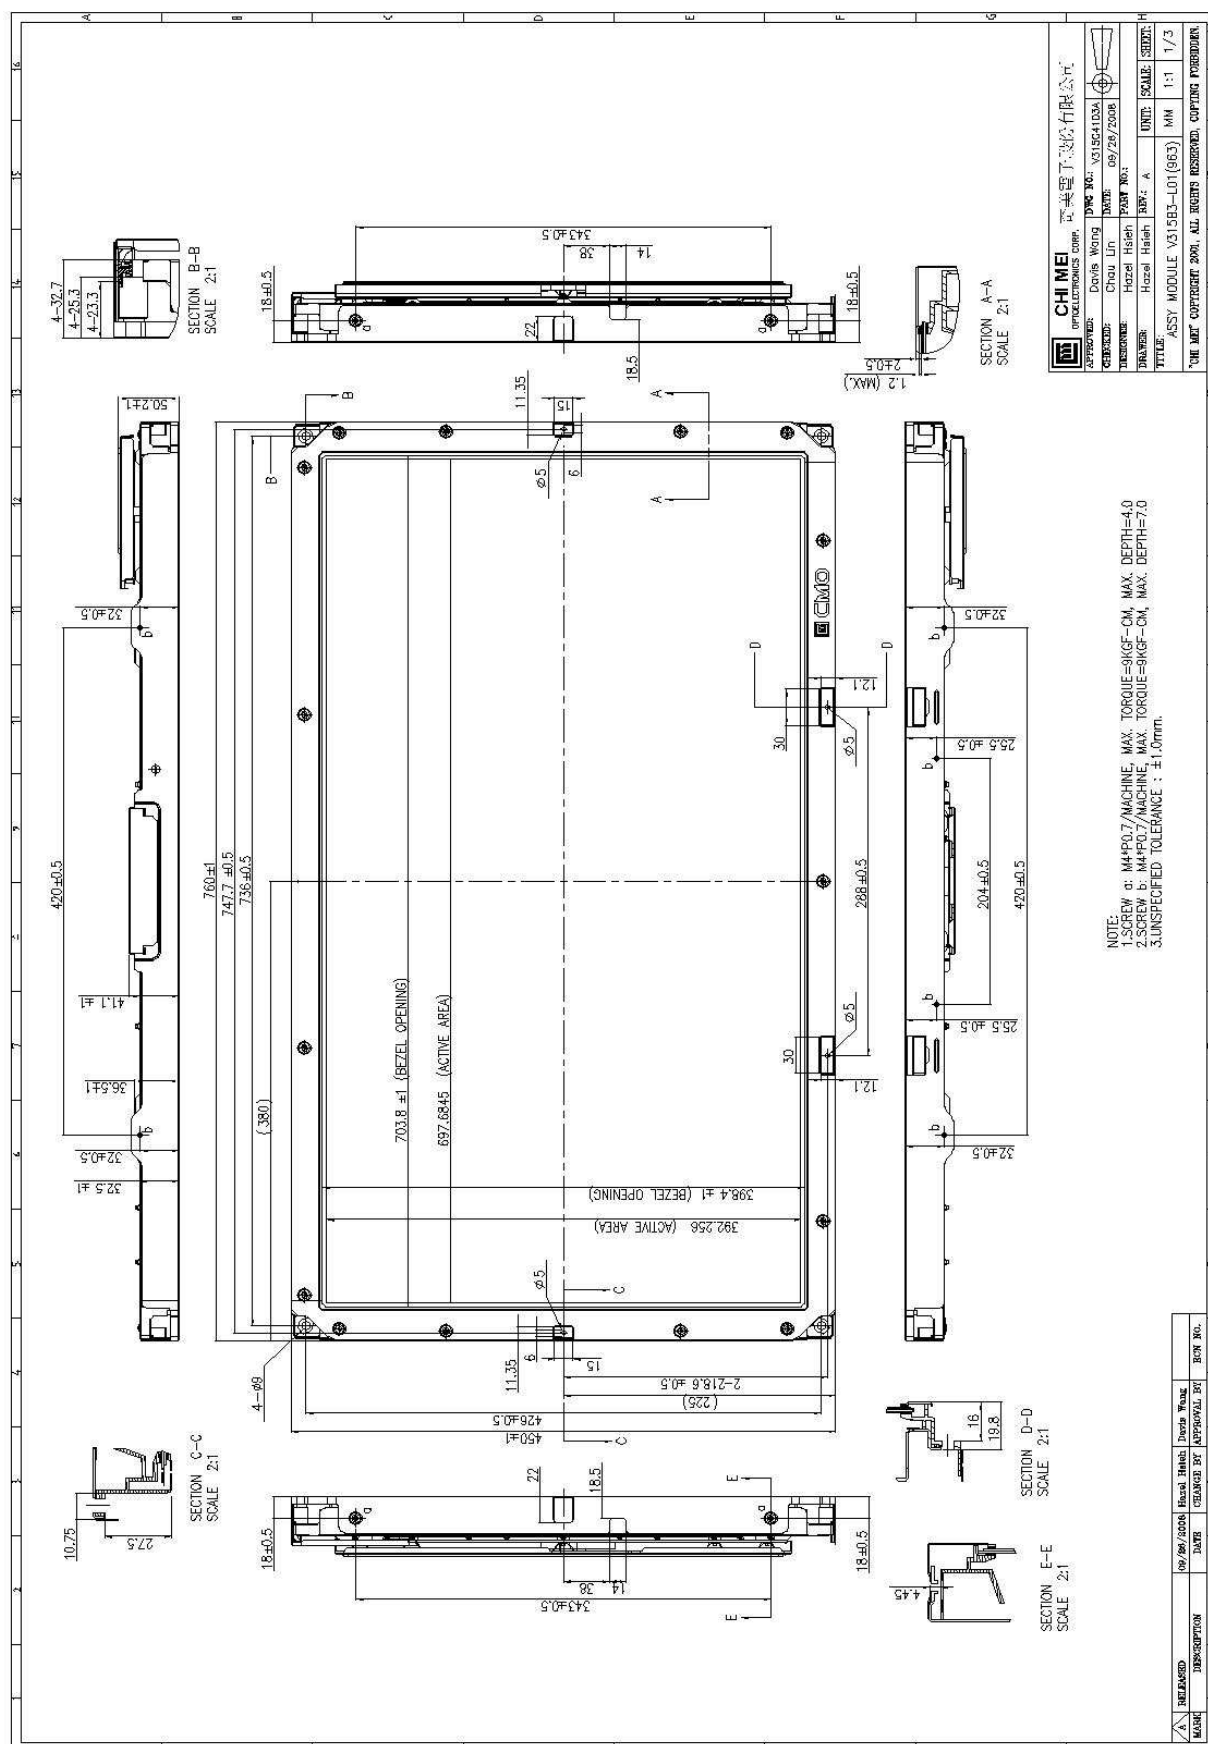
10.2 SAFETY PRECAUTIONS

(1) The startup voltage of a backlight is over 1000 Volts. It may cause an electrical shock while assembling with the inverter. Do not disassemble the module or insert anything into the backlight unit.

(2) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.

(3) After the module's end of life, it is not harmful in case of normal operation and storage.

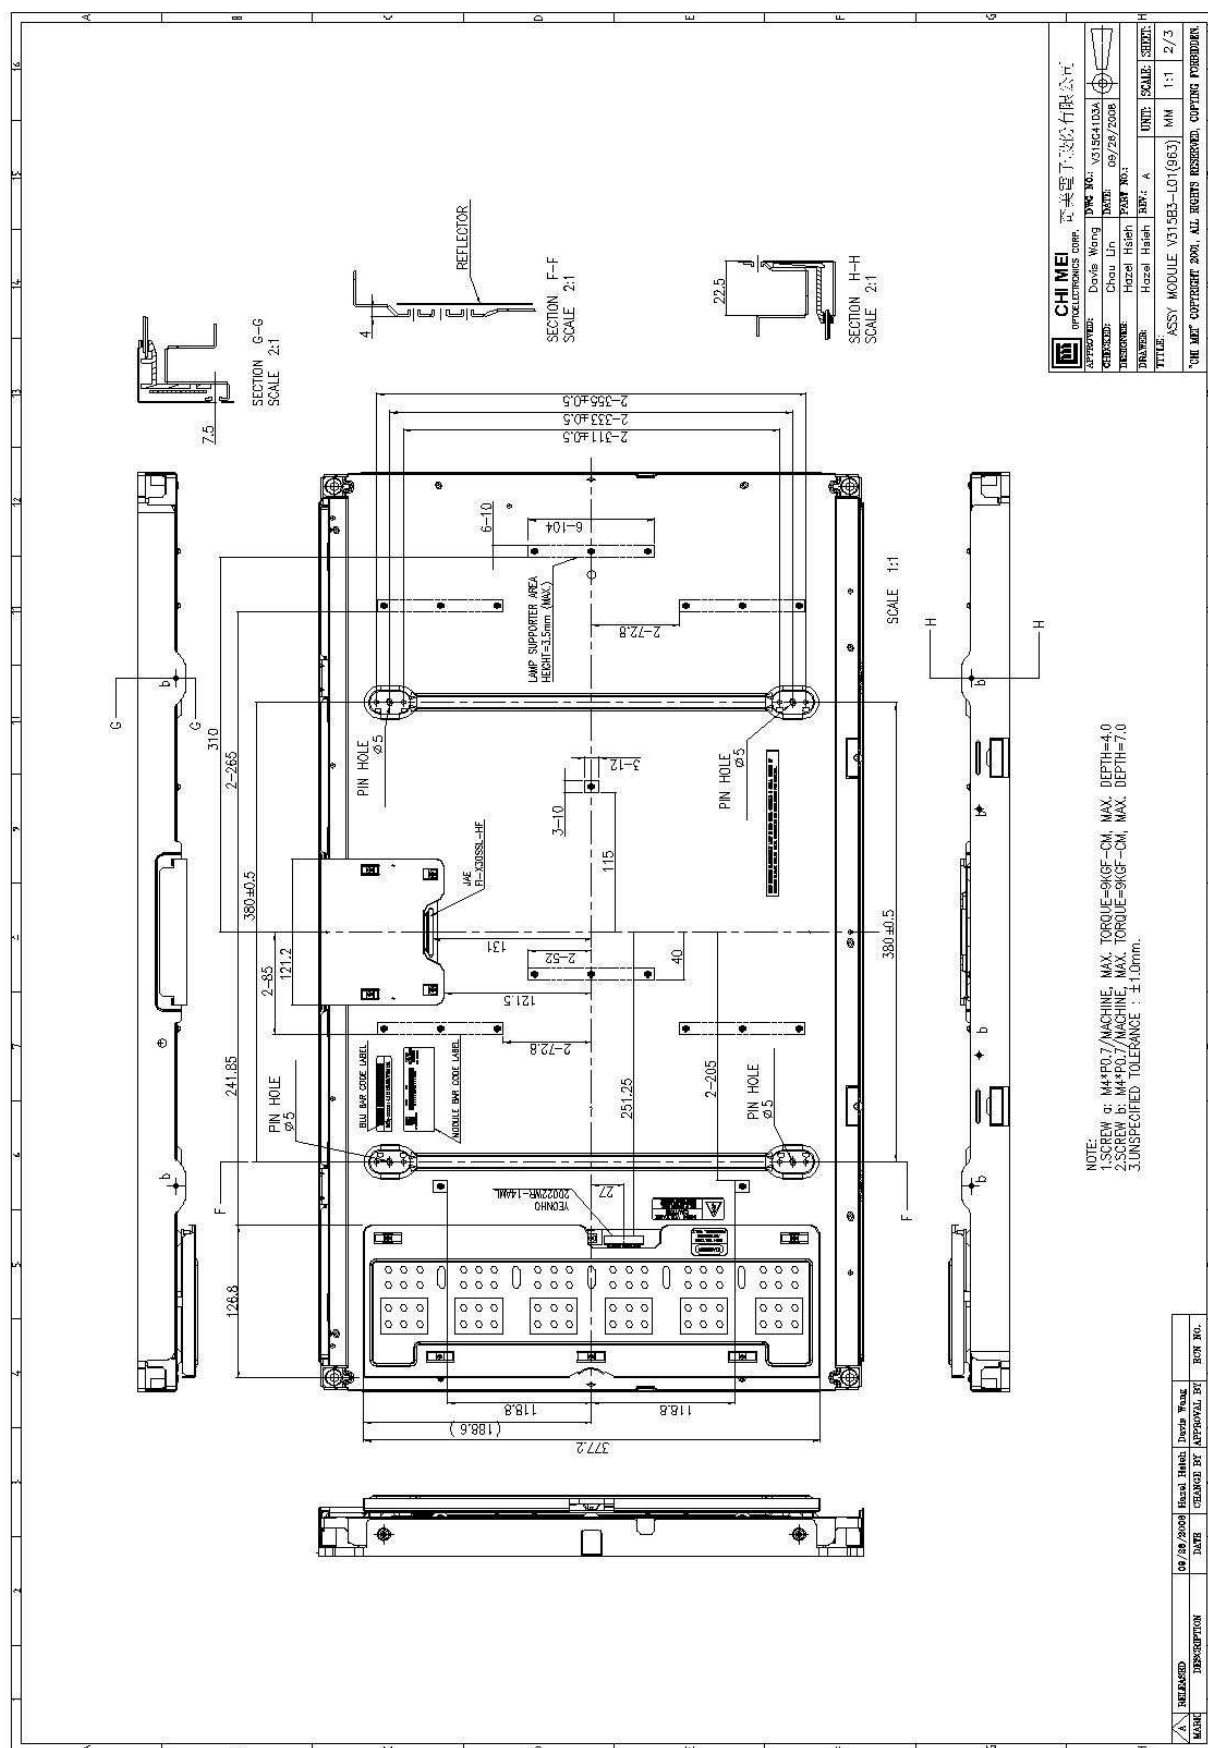### 10.3 SAFETY STANDARDS

The LCD module should be certified with safety regulations as follows:

(1) UL60950-1 or updated standard.

(2) IEC60950-1 or updated standard.

(3) UL60065 or updated standard.

(4) IEC60065 or updated standard.

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

11. MECHANICAL CHARACTERISTICS

31

Version 6.0

Approval

Version 6.0

CHI MEI
OPTOELECTRONICS CORP.

Issued Date: Oct.27, 2008
Model No.: V315B3-L01 (ECO only)

Approval

NOTE:
1.IT IS RECOMMENDED THAT ALL SCREWS SHOULD BE INCLUDED
   WHEN CMO'S PRODUCT IS APPLIED IN ORDER TO GUARANTEE STRUCTURE STRENGTH OF PRODUCT.
2.SCREW: M4 (PITCH 0.7 / MACHINE)
3.MAX. TORQUE: 9 KGF-CM.

CHI MEI
OPTOELECTRONICS CORP. 奇美電子股份有限公司

APPROVED:	Davis Wang	DWG NO.:	V315C41D3A
CHECKED:	Steven Lin	DATE:	09/26/2008
DESIGNED:	Hazel Hsieh	PART NO.:	
DRAWER:	Hazel Hsieh	REV.: A	
TITLE:	ASSY MODULE V315B3-L01(963)	UNIT: MM	SCALE: 1:1	SHEET: 3/3

CHI MEI COPYRIGHT 2001, ALL RIGHTS RESERVED, COPYING FORBIDDEN.

Version 6.0